

EN - For pricing and availability in your local country please visit one of the below links:

DE - Informationen zu Preisen und Verfügbarkeit in Ihrem Land erhalten Sie über die unten aufgeführten Links:

FR - Pour connaître les tarifs et la disponibilité dans votre pays, cliquez sur l'un des liens suivants:

[SKIIP 11NAB12T4V1](#)

EN

This Datasheet is presented by
the manufacturer

DE

Dieses Datenblatt wird vom
Hersteller bereitgestellt

FR

Cette fiche technique est
présentée par le fabricant

SKiIP 11NAB12T4V1



MiniSKiIP® 1

SKiIP 11NAB12T4V1

Features

- Trench 4 IGBT's
- Robust and soft freewheeling diodes in CAL technology
- Highly reliable spring contacts for electrical connections
- UL recognised file no. E63532


Typical Applications*

- Inverter up to 8 kVA
- Typical motor power 4 kW

Remarks

- V_{CEsat} , V_F = chip level value
- Case temp. limited to $T_C = 125^\circ\text{C}$ max. (for baseplateless modules $T_C = T_S$)
- product rel. results valid for $T_j \leq 150$ (recomm. Top = $-40 \dots +150^\circ\text{C}$)

| Absolute Maximum Ratings | | | | |
|-----------------------------|--|---------------------------|-------------|------------------|
| Symbol | Conditions | | Values | Unit |
| Inverter - IGBT | | | | |
| V_{CES} | $T_j = 25^\circ\text{C}$ | | 1200 | V |
| I_C | $T_j = 150^\circ\text{C}$ | $T_s = 25^\circ\text{C}$ | 12 | A |
| | | $T_s = 70^\circ\text{C}$ | 12 | A |
| I_C | $T_j = 175^\circ\text{C}$ | $T_s = 25^\circ\text{C}$ | 12 | A |
| | | $T_s = 70^\circ\text{C}$ | 12 | A |
| I_{Cnom} | | | 8 | A |
| I_{CRM} | $I_{CRM} = 3 \times I_{Cnom}$ | | 24 | A |
| V_{GES} | | | -20 ... 20 | V |
| t_{psc} | $V_{CC} = 800\text{ V}$ $V_{GE} \leq 15\text{ V}$ $V_{CES} \leq 1200\text{ V}$ | $T_j = 150^\circ\text{C}$ | 10 | μs |
| T_j | | | -40 ... 175 | $^\circ\text{C}$ |
| Chopper - IGBT | | | | |
| V_{CES} | $T_j = 25^\circ\text{C}$ | | 1200 | V |
| I_C | $T_j = 150^\circ\text{C}$ | $T_s = 25^\circ\text{C}$ | 12 | A |
| | | $T_s = 70^\circ\text{C}$ | 12 | A |
| I_C | $T_j = 175^\circ\text{C}$ | $T_s = 25^\circ\text{C}$ | 12 | A |
| | | $T_s = 70^\circ\text{C}$ | 12 | A |
| I_{Cnom} | | | 8 | A |
| I_{CRM} | $I_{CRM} = 3 \times I_{Cnom}$ | | 24 | A |
| V_{GES} | | | -20 ... 20 | V |
| t_{psc} | $V_{CC} = 800\text{ V}$ $V_{GE} \leq 15\text{ V}$ $V_{CES} \leq 1200\text{ V}$ | $T_j = 150^\circ\text{C}$ | 10 | μs |
| T_j | | | -40 ... 175 | $^\circ\text{C}$ |
| Inverse - Diode | | | | |
| V_{RRM} | $T_j = 25^\circ\text{C}$ | | 1200 | V |
| I_F | $T_j = 150^\circ\text{C}$ | $T_s = 25^\circ\text{C}$ | 14 | A |
| | | $T_s = 70^\circ\text{C}$ | 11 | A |
| I_F | $T_j = 175^\circ\text{C}$ | $T_s = 25^\circ\text{C}$ | 15 | A |
| | | $T_s = 70^\circ\text{C}$ | 12 | A |
| I_{Fnom} | | | 8 | A |
| I_{FRM} | $I_{FRM} = 3 \times I_{Fnom}$ | | 24 | A |
| I_{FSM} | $t_p = 10\text{ ms, sin } 180^\circ, T_j = 150^\circ\text{C}$ | | 36 | A |
| T_j | | | -40 ... 175 | $^\circ\text{C}$ |
| Freewheeling - Diode | | | | |
| V_{RRM} | $T_j = 25^\circ\text{C}$ | | 1200 | V |
| I_F | $T_j = 150^\circ\text{C}$ | $T_s = 25^\circ\text{C}$ | 14 | A |
| | | $T_s = 70^\circ\text{C}$ | 11 | A |
| I_F | $T_j = 175^\circ\text{C}$ | $T_s = 25^\circ\text{C}$ | 15 | A |
| | | $T_s = 70^\circ\text{C}$ | 12 | A |
| I_{Fnom} | | | 8 | A |
| I_{FRM} | $I_{FRM} = 3 \times I_{Fnom}$ | | 24 | A |
| I_{FSM} | $t_p = 10\text{ ms, sin } 180^\circ, T_j = 150^\circ\text{C}$ | | 36 | A |
| T_j | | | -40 ... 175 | $^\circ\text{C}$ |



NAB

SKiiP 11NAB12T4V1



MiniSKiiP® 1

SKiiP 11NAB12T4V1

Features


- Trench 4 IGBT's
- Robust and soft freewheeling diodes in CAL technology
- Highly reliable spring contacts for electrical connections
- UL recognised file no. E63532

Typical Applications*

- Inverter up to 8 kVA
- Typical motor power 4 kW

Remarks

- V_{CEsat} , V_F = chip level value
- Case temp. limited to $T_C = 125^\circ\text{C}$ max. (for baseplateless modules $T_C = T_S$)
- product rel. results valid for $T_j \leq 150$ (recomm. Top = $-40 \dots +150^\circ\text{C}$)

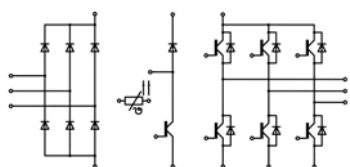

NAB

Absolute Maximum Ratings

| Symbol | Conditions | Values | Unit | |
|--------------------------|--|---------------------------|------|------------------|
| Rectifier - Diode | | | | |
| V_{RRM} | $T_j = 25^\circ\text{C}$ | 1600 | V | |
| I_F | $T_s = 25^\circ\text{C}, T_j = 150^\circ\text{C}$ | 39 | A | |
| I_{Fnom} | | 8 | A | |
| I_{FSM} | 10 ms | $T_j = 25^\circ\text{C}$ | 220 | A |
| | sin 180° | $T_j = 150^\circ\text{C}$ | 200 | A |
| I^2t | 10 ms | $T_j = 25^\circ\text{C}$ | 242 | A ² s |
| | sin 180° | $T_j = 150^\circ\text{C}$ | 200 | A ² s |
| T_j | | -40 ... 150 | °C | |
| Module | | | | |
| $I_{t(RMS)}$ | $T_{terminal} = 80^\circ\text{C}, 20\text{A per spring}$ | 20 | A | |
| T_{stg} | | -40 ... 125 | °C | |
| V_{isol} | AC sinus 50Hz, 1 min | 2500 | V | |

Characteristics

| Symbol | Conditions | min. | typ. | max. | Unit |
|------------------------|--|---------------------------|------|------|------|
| Inverter - IGBT | | | | | |
| $V_{CE(sat)}$ | $I_C = 8\text{ A}$ $V_{GE} = 15\text{ V}$ chipllevel | $T_j = 25^\circ\text{C}$ | 1.85 | 2.10 | V |
| | | $T_j = 150^\circ\text{C}$ | 2.25 | 2.45 | V |
| V_{CE0} | | $T_j = 25^\circ\text{C}$ | 0.8 | 0.9 | V |
| | | $T_j = 150^\circ\text{C}$ | 0.7 | 0.8 | V |
| r_{CE} | $V_{GE} = 15\text{ V}$ | $T_j = 25^\circ\text{C}$ | 131 | 150 | mΩ |
| | | $T_j = 150^\circ\text{C}$ | 194 | 206 | mΩ |
| $V_{GE(th)}$ | $V_{GE} = V_{CE}\text{ V}, I_C = 1\text{ mA}$ | 5 | 5.8 | 6.5 | V |
| I_{CES} | $V_{GE} = 0\text{ V}$ $V_{CE} = 1200\text{ V}$ | $T_j = 25^\circ\text{C}$ | 0.1 | 0.3 | mA |
| | | | | | mA |
| C_{ies} | $V_{CE} = 25\text{ V}$ $V_{GE} = 0\text{ V}$ | $f = 1\text{ MHz}$ | 0.49 | | nF |
| C_{oes} | | $f = 1\text{ MHz}$ | 0.05 | | nF |
| C_{res} | | $f = 1\text{ MHz}$ | 0.03 | | nF |
| Q_G | - 8 V...+ 15 V | | 45 | | nC |
| R_{Gint} | $T_j = 25^\circ\text{C}$ | | 0.00 | | Ω |
| $t_{d(on)}$ | $V_{CC} = 600\text{ V}$ | $T_j = 150^\circ\text{C}$ | 31 | | ns |
| t_r | $I_C = 8\text{ A}$ | $T_j = 150^\circ\text{C}$ | 31 | | ns |
| E_{on} | $R_{Gon} = 47\ \Omega$ | $T_j = 150^\circ\text{C}$ | 0.87 | | mJ |
| $t_{d(off)}$ | $R_{Goff} = 47\ \Omega$ | $T_j = 150^\circ\text{C}$ | 290 | | ns |
| t_f | | $T_j = 150^\circ\text{C}$ | 70 | | ns |
| E_{off} | $V_{GE} = +15/-15\text{ V}$ | $T_j = 150^\circ\text{C}$ | 0.74 | | mJ |
| $R_{th(j-s)}$ | per IGBT | | 1.84 | | K/W |
| Chopper - IGBT | | | | | |
| $V_{CE(sat)}$ | $I_C = 8\text{ A}$ $V_{GE} = 15\text{ V}$ chipllevel | $T_j = 25^\circ\text{C}$ | 1.85 | 2.10 | V |
| | | $T_j = 150^\circ\text{C}$ | 2.25 | 2.45 | V |
| V_{CE0} | | $T_j = 25^\circ\text{C}$ | 0.8 | 0.9 | V |
| | | $T_j = 150^\circ\text{C}$ | 0.7 | 0.8 | V |
| r_{CE} | $V_{GE} = 15\text{ V}$ | $T_j = 25^\circ\text{C}$ | 131 | 150 | mΩ |
| | | $T_j = 150^\circ\text{C}$ | 194 | 206 | mΩ |
| $V_{GE(th)}$ | $V_{GE} = V_{CE}\text{ V}, I_C = 1\text{ mA}$ | 5 | 5.8 | 6.5 | V |
| I_{CES} | $V_{GE} = 0\text{ V}$ $V_{CE} = 1200\text{ V}$ | $T_j = 25^\circ\text{C}$ | 0.1 | 0.3 | mA |
| | | $T_j = 150^\circ\text{C}$ | | | mA |
| Q_G | - 8 V...+ 15 V | | 45 | | nC |
| R_{Gint} | $T_j = 25^\circ\text{C}$ | | 0.00 | | Ω |

SKiiP 11NAB12T4V1



MiniSKiiP® 1

SKiiP 11NAB12T4V1

Features


- Trench 4 IGBT's
- Robust and soft freewheeling diodes in CAL technology
- Highly reliable spring contacts for electrical connections
- UL recognised file no. E63532

Typical Applications*

- Inverter up to 8 kVA
- Typical motor power 4 kW

Remarks

- V_{CEsat} , V_F = chip level value
- Case temp. limited to $T_C = 125^\circ\text{C}$ max. (for baseplateless modules $T_C = T_S$)
- product rel. results valid for $T_j \leq 150$ (recomm. Top = $-40 \dots +150^\circ\text{C}$)

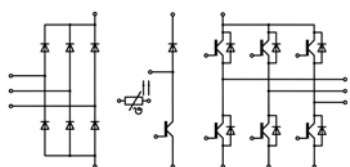

NAB

| Characteristics | | | | | |
|-----------------------------|---|---------------------------|---------------|------|---------------|
| Symbol | Conditions | min. | typ. | max. | Unit |
| Chopper - IGBT | | | | | |
| $t_{d(on)}$ | $V_{CC} = 600\text{ V}$ | $T_j = 150^\circ\text{C}$ | 31 | | ns |
| t_r | $I_C = 8\text{ A}$ | $T_j = 150^\circ\text{C}$ | 31 | | ns |
| E_{on} | $R_{G\ on} = 47\ \Omega$ $R_{G\ off} = 47\ \Omega$ | $T_j = 150^\circ\text{C}$ | 0.87 | | mJ |
| $t_{d(off)}$ | | $T_j = 150^\circ\text{C}$ | 290 | | ns |
| t_f | | $T_j = 150^\circ\text{C}$ | 70 | | ns |
| E_{off} | $V_{GE} = +15/-15\text{ V}$ | $T_j = 150^\circ\text{C}$ | 0.74 | | mJ |
| $R_{th(j-s)}$ | per IGBT | | 1.84 | | K/W |
| Inverse - Diode | | | | | |
| $V_F = V_{EC}$ | $I_F = 8\text{ A}$ $V_{GE} = 0\text{ V}$ chiplevel | $T_j = 25^\circ\text{C}$ | 2.3 | 2.6 | V |
| | | $T_j = 150^\circ\text{C}$ | 2.4 | 2.7 | V |
| V_{F0} | | $T_j = 25^\circ\text{C}$ | 1.3 | 1.5 | V |
| | | $T_j = 150^\circ\text{C}$ | 0.9 | 1.1 | V |
| r_F | | $T_j = 25^\circ\text{C}$ | 129 | 144 | m Ω |
| | | $T_j = 150^\circ\text{C}$ | 181 | 198 | m Ω |
| I_{RRM} | $I_F = 8\text{ A}$ | $T_j = 150^\circ\text{C}$ | 8.3 | | A |
| Q_{rr} | $di/dt_{off} = 380\text{ A}/\mu\text{s}$ $V_{GE} = -15\text{ V}$ | $T_j = 150^\circ\text{C}$ | 1.35 | | μC |
| E_{rr} | $V_{CC} = 600\text{ V}$ | $T_j = 150^\circ\text{C}$ | 0.57 | | mJ |
| $R_{th(j-s)}$ | per Diode | | 2.53 | | K/W |
| Freewheeling - Diode | | | | | |
| $V_F = V_{EC}$ | $I_F = 8\text{ A}$ $V_{GE} = 0\text{ V}$ chiplevel | $T_j = 25^\circ\text{C}$ | 2.3 | 2.6 | V |
| | | $T_j = 150^\circ\text{C}$ | 2.4 | 2.7 | V |
| V_{F0} | | $T_j = 25^\circ\text{C}$ | 1.3 | 1.5 | V |
| | | $T_j = 150^\circ\text{C}$ | 0.9 | 1.1 | V |
| r_F | | $T_j = 25^\circ\text{C}$ | 129 | 144 | m Ω |
| | | $T_j = 150^\circ\text{C}$ | 181 | 198 | m Ω |
| I_{RRM} | $I_F = 8\text{ A}$ | $T_j = 150^\circ\text{C}$ | 8.3 | | A |
| Q_{rr} | $di/dt_{off} = 380\text{ A}/\mu\text{s}$ $V_{GE} = -15\text{ V}$ | $T_j = 150^\circ\text{C}$ | 1.35 | | μC |
| E_{rr} | $V_{CC} = 600\text{ V}$ | $T_j = 150^\circ\text{C}$ | 0.57 | | mJ |
| $R_{th(j-s)}$ | per Diode | | 2.53 | | K/W |
| Rectifier - Diode | | | | | |
| $V_F = V_{EC}$ | $I_F = 8\text{ A}$ $V_{GE} = 0\text{ V}$ chiplevel | $T_j = 25^\circ\text{C}$ | 1 | 1.21 | V |
| | | $T_j = 125^\circ\text{C}$ | | 1.1 | V |
| V_{F0} | | $T_j = 25^\circ\text{C}$ | | 1.0 | V |
| | | $T_j = 125^\circ\text{C}$ | | 0.8 | V |
| r_F | | $T_j = 25^\circ\text{C}$ | 15 | 29 | m Ω |
| | | $T_j = 125^\circ\text{C}$ | | 34 | m Ω |
| $R_{th(j-s)}$ | per Diode | | 1.5 | | K/W |
| Module | | | | | |
| M_s | to heat sink | | 2 | 2.5 | Nm |
| w | | | 35 | | g |
| Temperatur Sensor | | | | | |
| R_{100} | $T_r = 100^\circ\text{C}$, tolerance = 3 % | | 1670 \pm 3% | | Ω |
| $R(T)$ | $R(T) = 1000\ \Omega [1 + A(T - 25^\circ\text{C}) + B(T - 25^\circ\text{C})^2]$ $A = 7.635 \cdot 10^{-3}\ \text{C}^{-1}$, $B = 1.731 \cdot 10^{-5}\ \text{C}^{-2}$ | | | | |

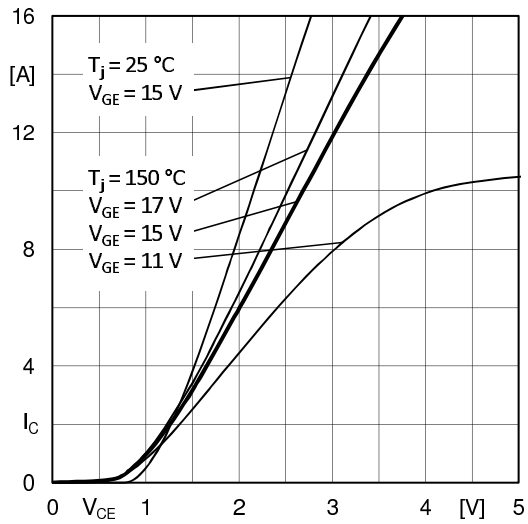


Fig. 1: Typ. output characteristic

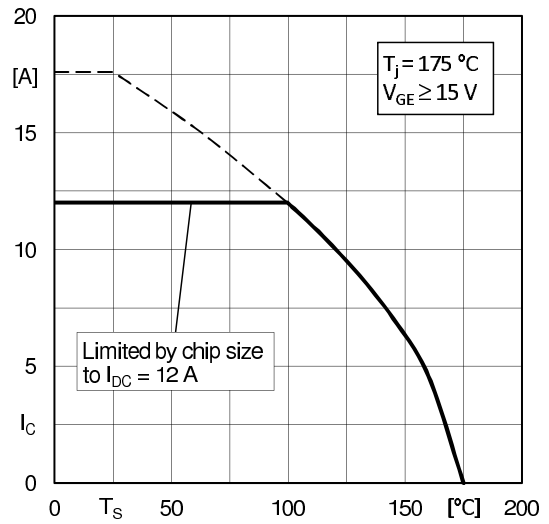


Fig. 2: Typ. rated current vs. temperature $I_C = f(T_S)$

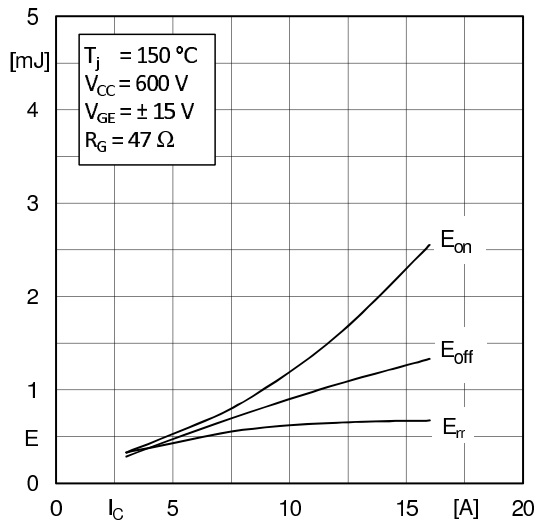


Fig. 3: Typ. turn-on /-off energy = f(Ic)

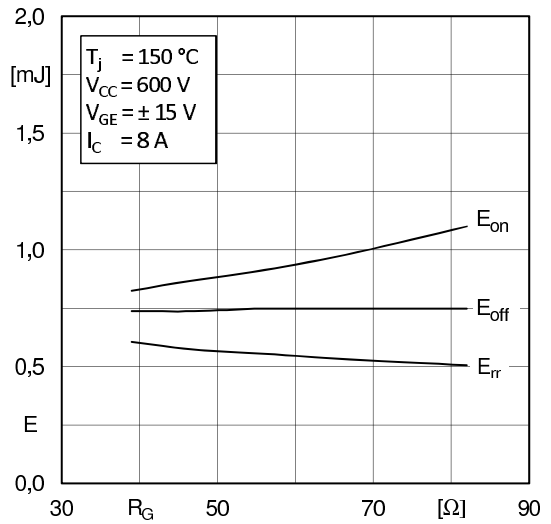


Fig. 4: Typ. turn-on /-off energy = f(RG)

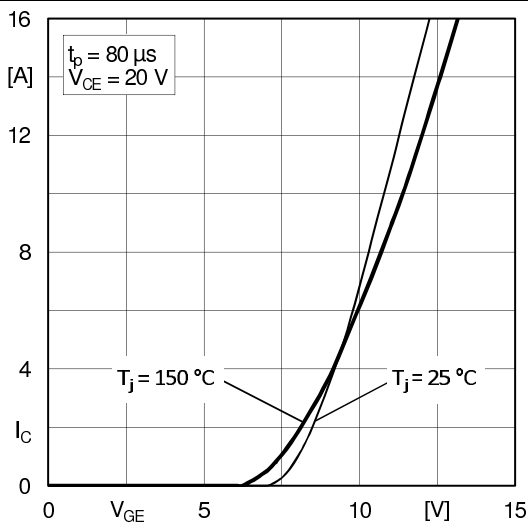


Fig. 5: Typ. transfer characteristic

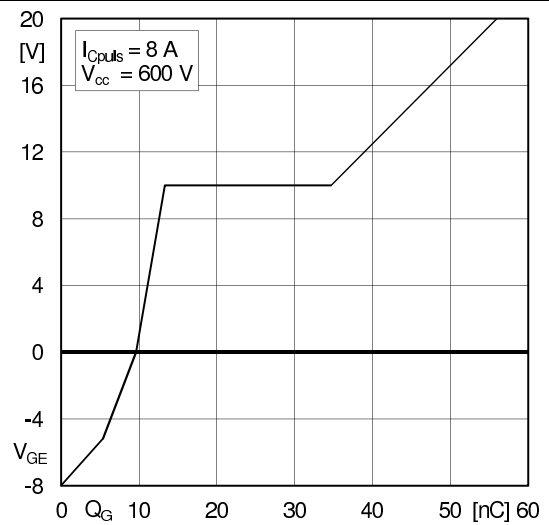


Fig. 6: Typ. gate charge characteristic

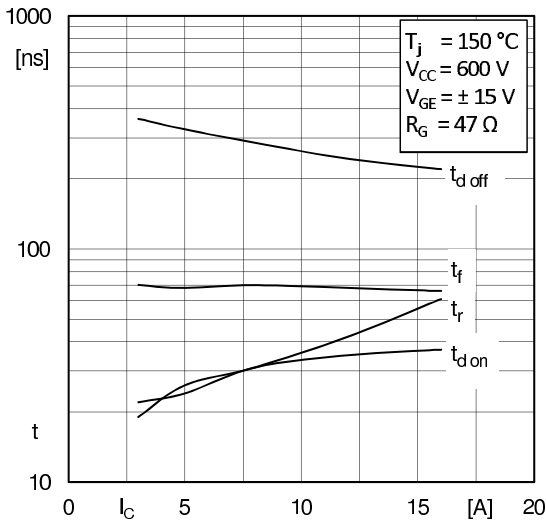


Fig. 7: Typ. switching times vs. I_C

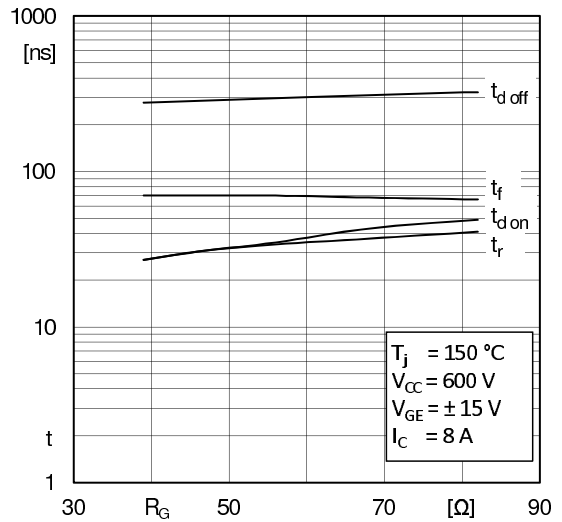


Fig. 8: Typ. switching times vs. gate resistor R_G

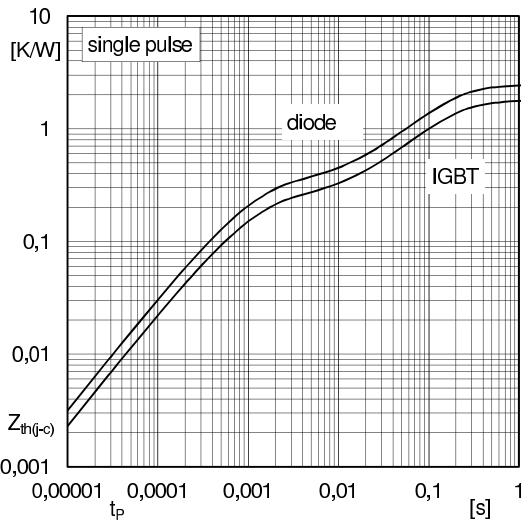


Fig. 9: Transient thermal impedance of IGBT and Diode

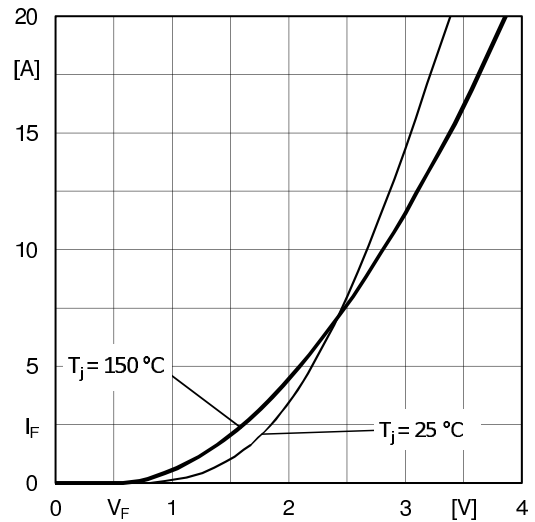


Fig. 10: CAL diode forward characteristic

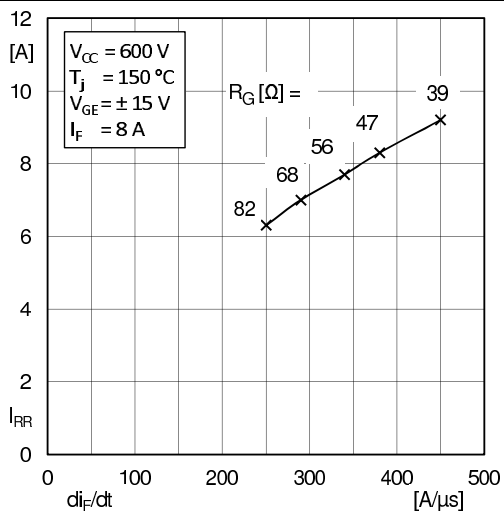


Fig. 11: Typ. CAL diode peak reverse recovery current

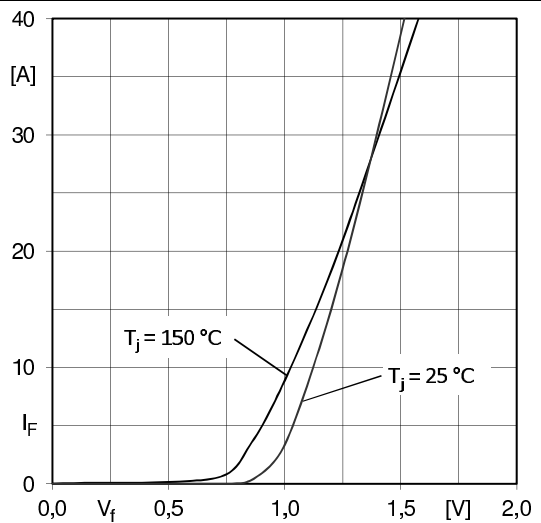


Fig. 12: Typ. input bridge forward characteristic

EN - For pricing and availability in your local country please visit one of the below links:

DE - Informationen zu Preisen und Verfügbarkeit in Ihrem Land erhalten Sie über die unten aufgeführten Links:

FR - Pour connaître les tarifs et la disponibilité dans votre pays, cliquez sur l'un des liens suivants:

[SKIIP 11NAB12T4V1](#)

EN

This Datasheet is presented by
the manufacturer

DE

Dieses Datenblatt wird vom
Hersteller bereitgestellt

FR

Cette fiche technique est
présentée par le fabricant