

# RM300CA-9W

HIGH FREQUENCY USE  
INSULATED TYPE

## RM300CA-9W




- **Idc** DC current ..... **300A**
- **VRRM** Repetitive peak reverse voltage ..... **450V**
- **trr** Reverse recovery time ..... **0.5μs**

## APPLICATION

Free wheel use, Welders

## OUTLINE DRAWING & CIRCUIT DIAGRAM

Dimensions in mm

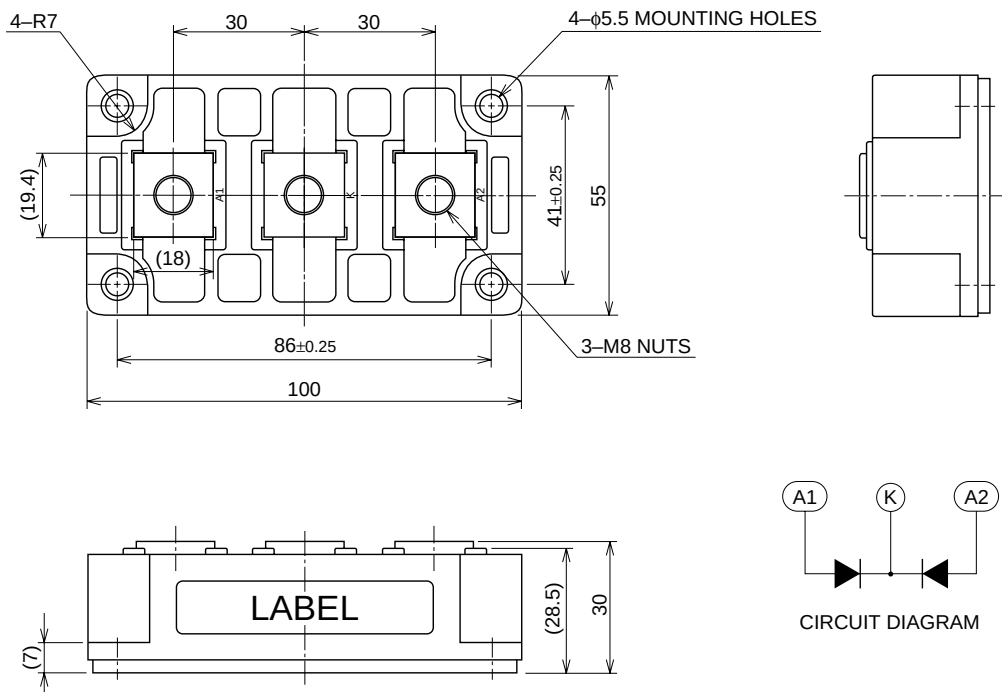

# RM300CA-9W

HIGH FREQUENCY USE  
INSULATED TYPE

## ABSOLUTE MAXIMUM RATINGS (Tj=25°C)

| Symbol  | Parameter                       | Voltage class | Unit |
|---------|---------------------------------|---------------|------|
|         |                                 | 9W            |      |
| VRRM    | Repetitive peak reverse voltage | 450           | V    |
| VR (DC) | Reverse DC voltage              | 360           | V    |

| Symbol           | Parameter                              | Conditions                                                    | Ratings               | Unit             |
|------------------|----------------------------------------|---------------------------------------------------------------|-----------------------|------------------|
| Idc              | DC current                             | Resistive load, Tc=119°C                                      | 300                   | A                |
| IFSM             | Surge (non-repetitive) forward current | One half cycle at 60Hz, peak value                            | 6000                  | A                |
| I <sup>2</sup> t | I <sup>2</sup> t for fusing            | Value for one cycle of surge current, tw=8.3ms, Tj=25°C Start | 1.5 × 10 <sup>5</sup> | A <sup>2</sup> s |
| Tj               | Junction temperature                   |                                                               | -40~+150              | °C               |
| Tstg             | Storage temperature                    |                                                               | -40~+125              | °C               |
| Visol            | Isolation voltage                      | Charged part to case                                          | 2500                  | V                |
| —                | Mounting torque                        | Main terminal screw M8                                        | 8.83~10.8             | N·m              |
|                  |                                        | Mounting screw M5                                             | 1.47~1.96             | N·m              |
| —                | Weight                                 | Typical value                                                 | 460                   | g                |

## ELECTRICAL CHARACTERISTICS


| Symbol    | Parameter                  | Test conditions                           | Limits |      |       | Unit |
|-----------|----------------------------|-------------------------------------------|--------|------|-------|------|
|           |                            |                                           | Min.   | Typ. | Max.  |      |
| IRRM      | Repetitive reverse current | Tj=150°C, VRRM applied                    | —      | —    | 40    | mA   |
| VFM       | Forward voltage            | Tj=25°C, IFM=300A                         | —      | —    | 1.2   | V    |
| trr       | Reverse recovery time      | If=300A, Tj=25°C. di/dt=—600A/μs, VR=300V | —      | —    | 0.5   | μs   |
| Qrr       | Reverse recovery charge    |                                           | —      | —    | 50    | μC   |
| Rth (j-c) | Thermal resistance         | Junction to case                          | —      | —    | 0.085 | °C/W |
| Rth (c-f) | Contact thermal resistance | Case to fin, with thermal compound        | —      | —    | 0.08  | °C/W |
| —         | Insulation resistance      | Main terminal to case                     | 10     | —    | —     | MΩ   |

# RM300CA-9W


HIGH FREQUENCY USE  
INSULATED TYPE

## PERFORMANCE CURVES

FORWARD VOLTAGE DROP CHARACTERISTIC  
(TYPICAL)

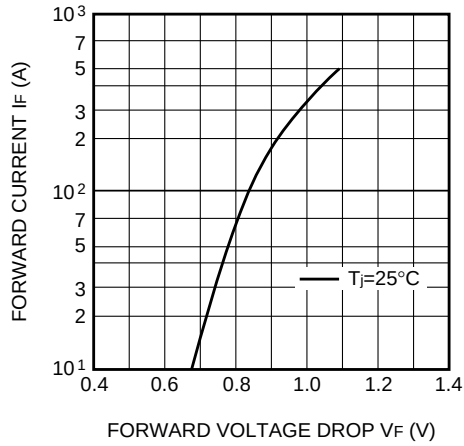

REVERSE RECOVERY CHARACTERISTICS  
VS. FORWARD CURRENT (TYPICAL)

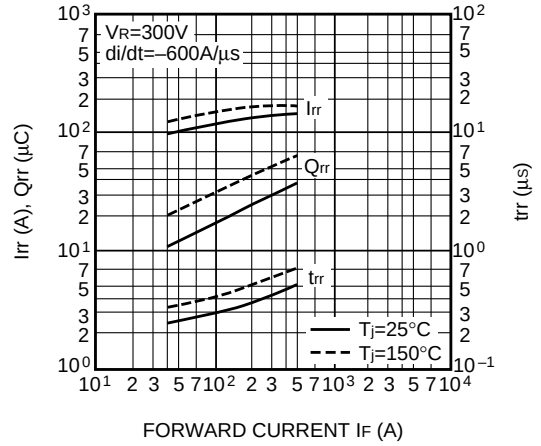

REVERSE RECOVERY CHARACTERISTICS  
VS.  $di/dt$  (TYPICAL)

