

SKM 100GB12T4



SEMITRANS® 2

IGBT4 Modules

SKM 100GB12T4

Target Data

Features

- IGBT4 = 4. Generation (Trench) IGBT
- V_{CEsat} with positive temperature coefficient
- High short circuit capability, self limiting to $6 \times I_{CNOM}$
- Soft switching 4. generation CAL diode (CAL4)

Typical Applications


- AC inverter drives
- UPS
- Electronic welders at f_{sw} up to 20 kHz

Remarks

- Case temperature limited to $T_c = 125^\circ\text{C}$ max, recomm. $T_{op} = -40 \dots +150^\circ\text{C}$, product rel. results valid for $T_j \leq 150^\circ$

Absolute Maximum Ratings			T _c = 25 °C, unless otherwise specified	
Symbol	Conditions		Values	Units
IGBT				
V _{CES}	T _j = 25 °C		1200	V
I _C	T _j = 175 °C	T _{case} = 25 °C	160	A
		T _{case} = 80 °C	125	A
I _{CRM}	I _{CRM} = 3 × I _{CNOM}		300	A
V _{GES}			± 20	V
t _{psc}	V _{CC} = 600 V; V _{GE} ≤ 15 V; T _j = 150 °C V _{CES} < 1200 V		10	μs
Inverse Diode				
I _F	T _j = 175 °C	T _{case} = 25 °C	120	A
		T _{case} = 80 °C	90	A
I _{FRM}	I _{FRM} = 3 × I _{FNOM}		300	A
I _{FSM}	t _p = 10 ms; sin.	T _j = 175 °C	550	A
Module				
I _{t(RMS)}			200	A
T _{vj}			-40 ... +175	°C
T _{stg}			-40 ... +125	°C
V _{isol}	AC, 1 min.		4000	V

Characteristics			T _c = 25 °C, unless otherwise specified			
Symbol	Conditions		min.	typ.	max.	Units
IGBT						
V _{GE(th)}	V _{GE} = V _{CE} , I _C = 4 mA		5	5,8	6,5	V
I _{CES}	V _{GE} = V, V _{CE} = V _{CES} T _j = °C					mA
V _{CE0}	T _j = 25 °C			0,8	0,9	V
	T _j = 150 °C			0,7	0,8	V
r _{CE}	V _{GE} = 15 V T _j = 25°C			10	11	mΩ
	T _j = 150°C			15	16	mΩ
V _{CE(sat)}	I _{Cnom} = 100 A, V _{GE} = 15 V T _j = 25°C _{chiplev.}			1,8	2	V
	T _j = 150°C _{chiplev.}			2,2	2,4	V
C _{ies}	V _{CE} = 25, V _{GE} = 0 V f = 1 MHz		6,2			nF
C _{oes}			0,41			nF
C _{res}			0,35			nF
Q _G	V _{GE} = -8V/+15V		570			nC
R _{Gint}	T _j = 25 °C		7,5			Ω
t _{d(on)}	R _{Gon} =	V _{CC} = 600V I _{Cnom} = 100A T _j = 150 °C	11		ns	
t _r					ns	
E _{on}	11		mJ			
t _{d(off)}			ns			
t _f	ns					
E _{off}	mJ					
R _{th(j-c)}	per IGBT		0,27		K/W	



GB



SEMITRANS® 2

IGBT4 Modules

SKM 100GB12T4

Target Data

Features

- IGBT4 = 4. Generation (Trench) IGBT
- V_{CEsat} with positive temperature coefficient
- High short circuit capability, self limiting to $6 \times I_{CNOM}$
- Soft switching 4. generation CAL diode (CAL4)

Typical Applications

- AC inverter drives
- UPS
- Electronic welders at f_{sw} up to 20 kHz


Remarks

- Case temperature limited to $T_c = 125^\circ\text{C}$ max, recomm. $T_{op} = -40 \dots +150^\circ\text{C}$, product rel. results valid for $T_j \leq 150^\circ$





Characteristics					
Symbol	Conditions	min.	typ.	max.	Units
Inverse Diode					
$V_F = V_{EC}$	$I_{Fnom} = 100 \text{ A}; V_{GE} = 0 \text{ V}$				
	$T_j = 25^\circ\text{C}_{chiplev.}$		2,2	2,5	V
	$T_j = 150^\circ\text{C}_{chiplev.}$		2,1	2,45	V
V_{F0}	$T_j = 25^\circ\text{C}$		1,3	1,5	V
	$T_j = 150^\circ\text{C}$		0,9	1,1	V
r_F	$T_j = 25^\circ\text{C}$		9	11	mΩ
	$T_j = 150^\circ\text{C}$		12	13,5	mΩ
I_{RRM}	$I_{Fnom} = 100 \text{ A}$				A
Q_{rr}					μC
E_{rr}	$V_{GE} \leq -8 \text{ V}$		7,5		mJ
$R_{th(j-c)}$	per diode			0,48	K/W
Freewheeling Diode					
$V_F = V_{EC}$	$I_{Fnom} = \text{A}; V_{GE} = \text{V}$				V
V_{F0}	$T_j = ^\circ\text{C}$				V
r_F	$T_j = ^\circ\text{C}$				V
I_{RRM}	$I_{Fnom} = \text{A}$				A
Q_{rr}					μC
E_{rr}					mJ
	per diode				K/W
Module					
L_{CE}			20	30	nH
$R_{CC'+EE'}$	res., terminal-chip	$T_{case} = 25^\circ\text{C}$		0,75	mΩ
		$T_{case} = 125^\circ\text{C}$		1	mΩ
$R_{th(c-s)}$	per module			0,05	K/W
M_s	to heat sink M6		3	5	Nm
M_t	to terminals M5		2,5	5	Nm
w				160	g



This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.



GB

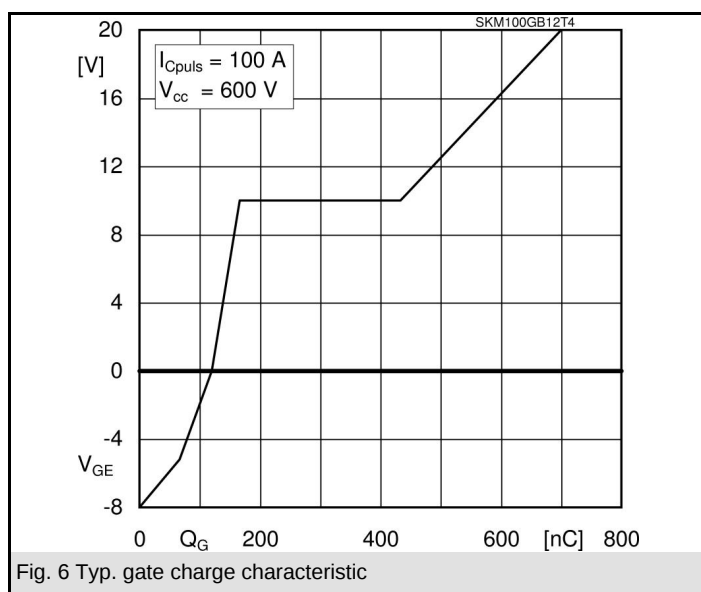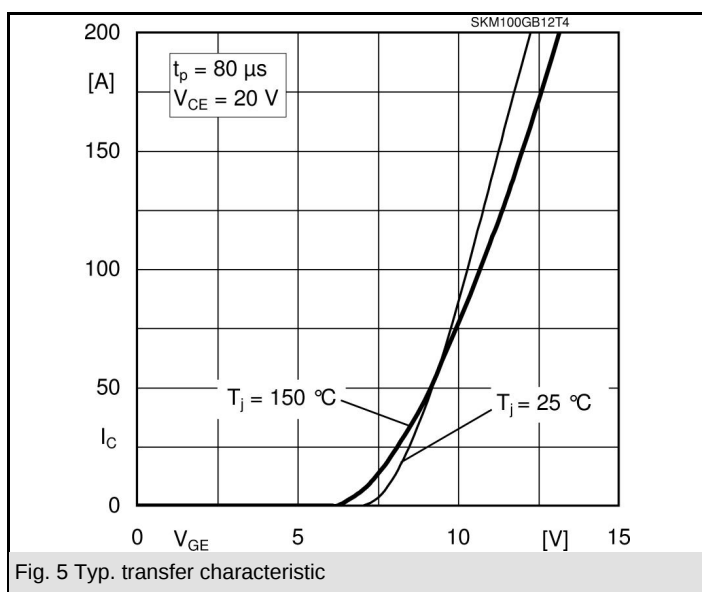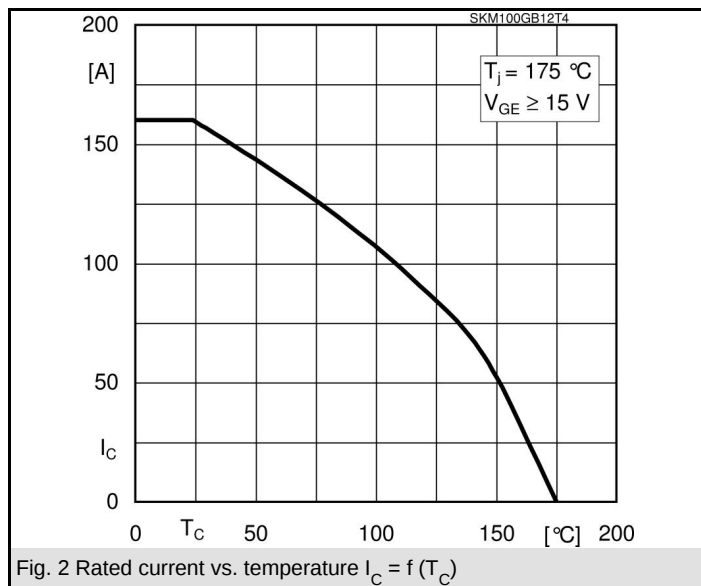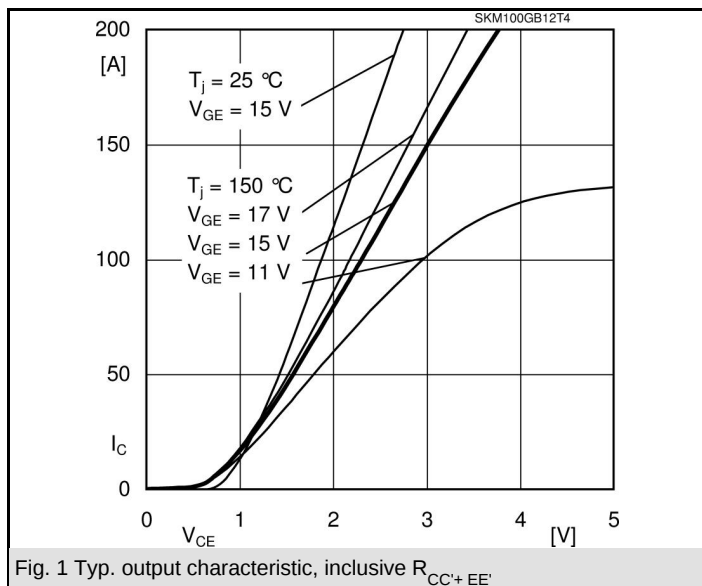

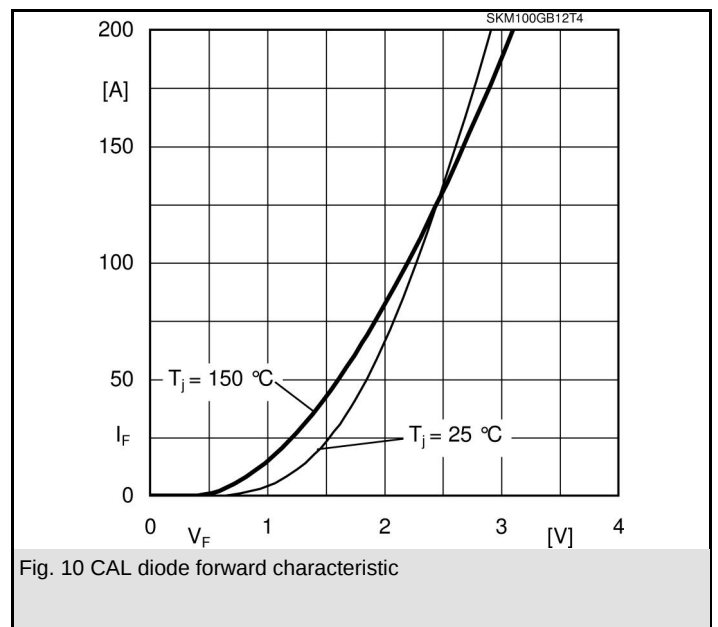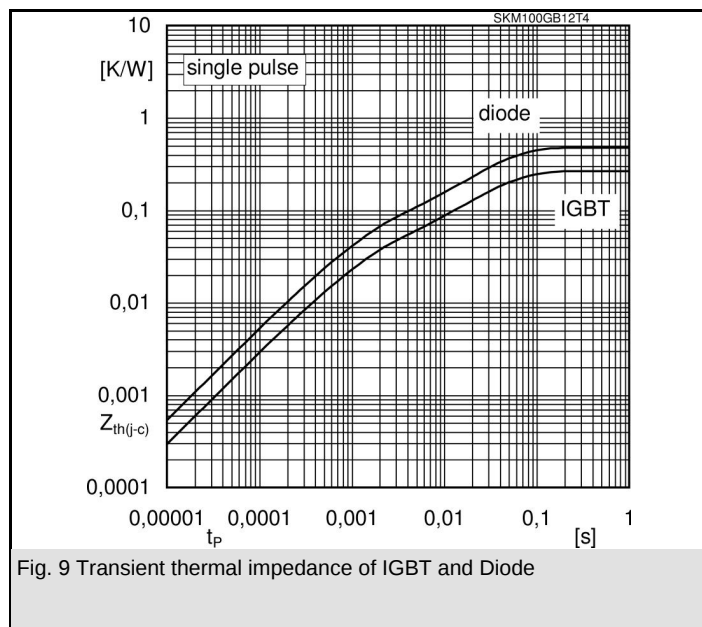

SKM 100GB12T4

UL recognized file

CASED61

no. E 63 532

